


A set of tillage machines with a width of 8.0 m


Disc harrow U 652 8.0 m

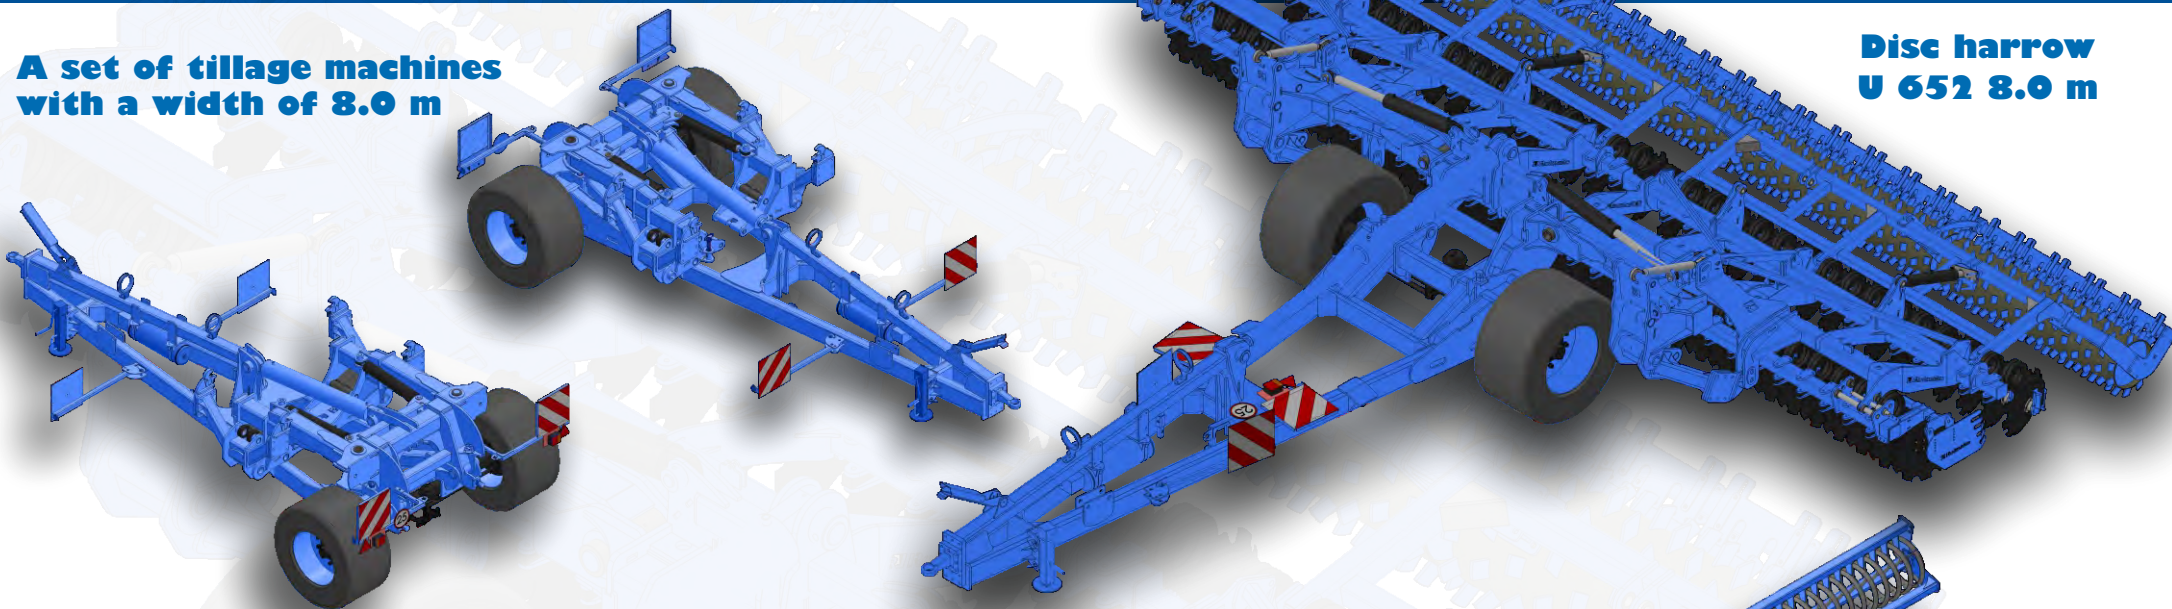


The BigField machine consists of a chassis with a system carrier and two mounted machines with a width of 4.0 m. The BigField device is equipped with two hydraulic suspension systems that allow to use it with various tillage machines:

- Compact tillage cultivator U 684
- Disc harrow U 671
- Universal crop cultivator U 497

- Compact disc harrow U 693
- Heavy disc harrow U 671

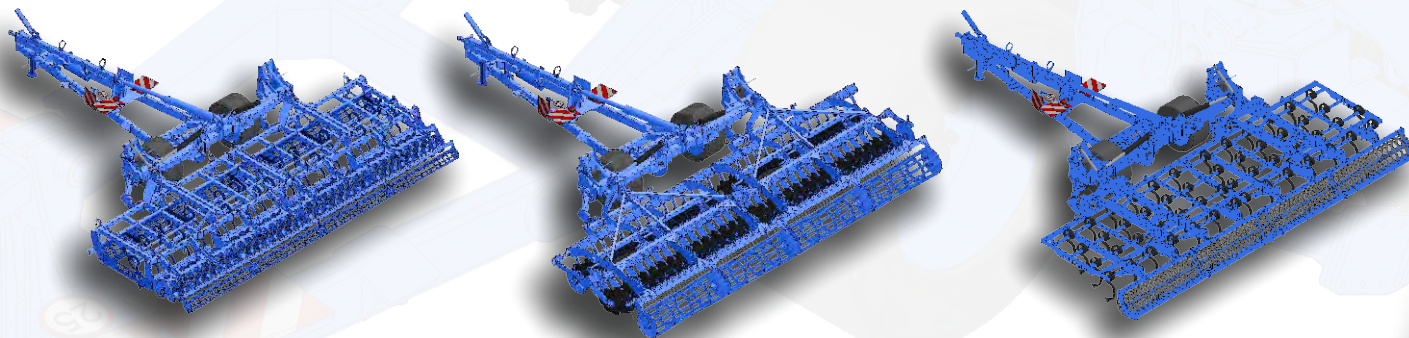


Tillage machines 8.0 m in the working position (from the left U 684 PRO, U 671 and U 497)

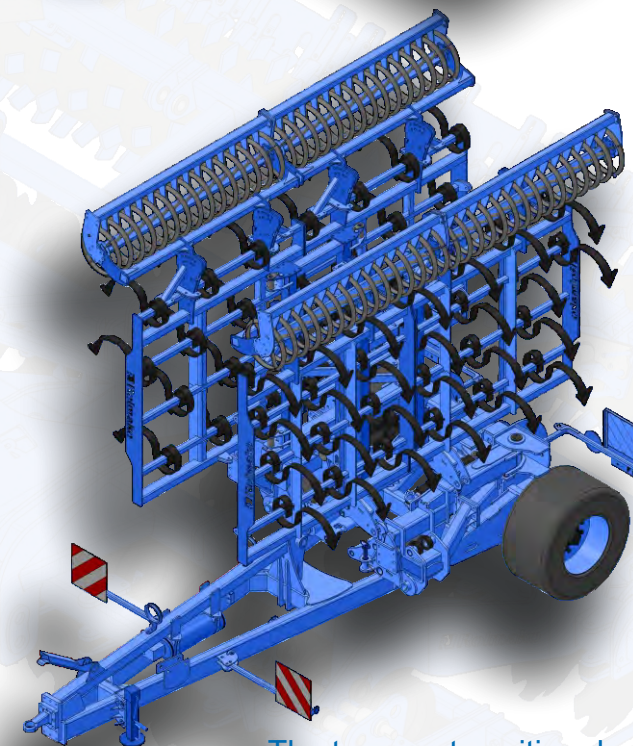


The transport position does not exceed the width of 3.0 m

One system carrier offers the unique opportunity to use various tools for land cultivation. It is a well-thought-out investment which does not generate unnecessary costs.


Universal crop cultivator U 497

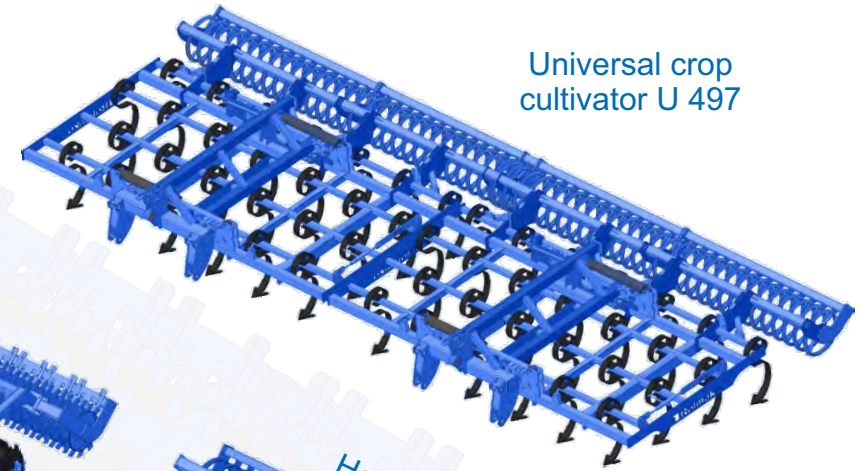


Disc harrow U 652

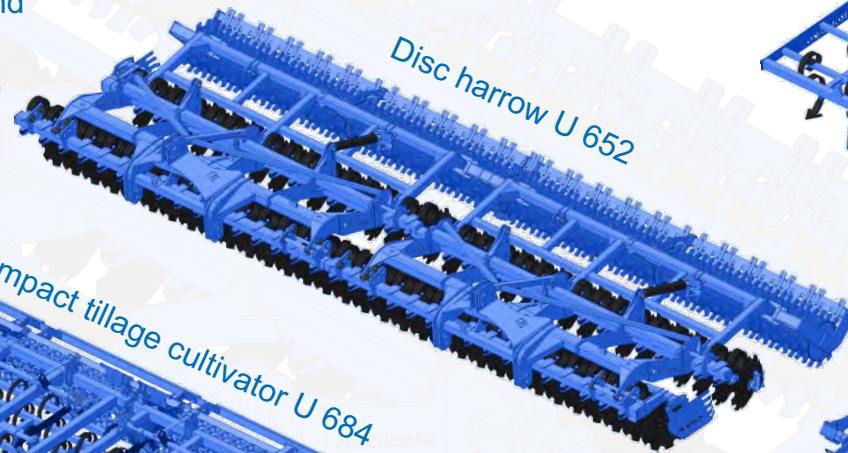


Compact tillage cultivator U 684

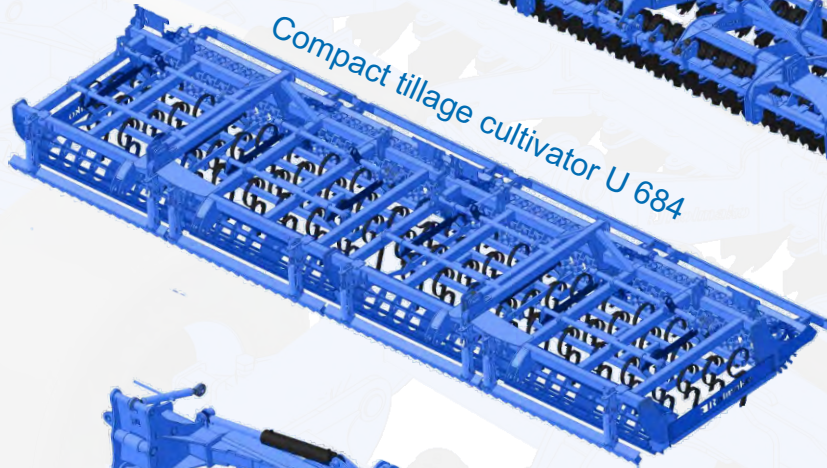


Heavy stubble harrow U 671

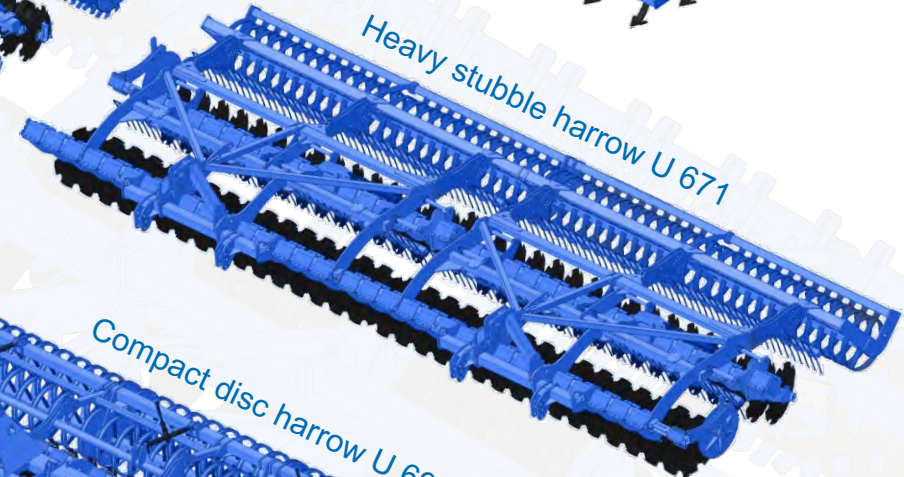


Compact disc harrow U 693

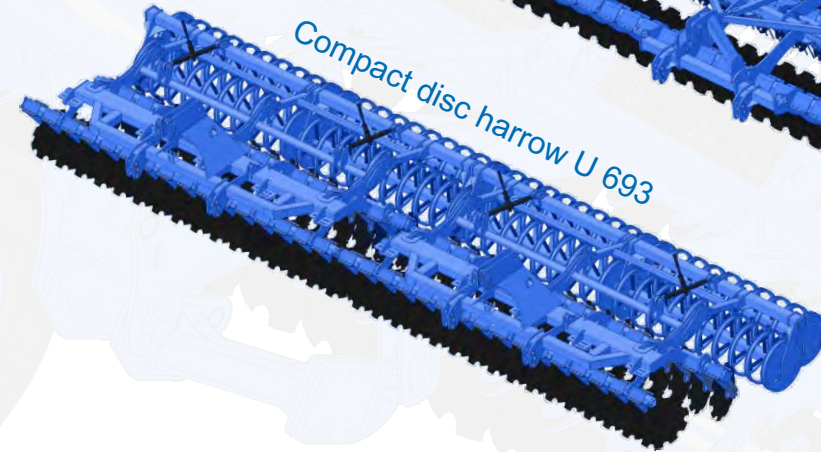


BigField system carrier 8,0m

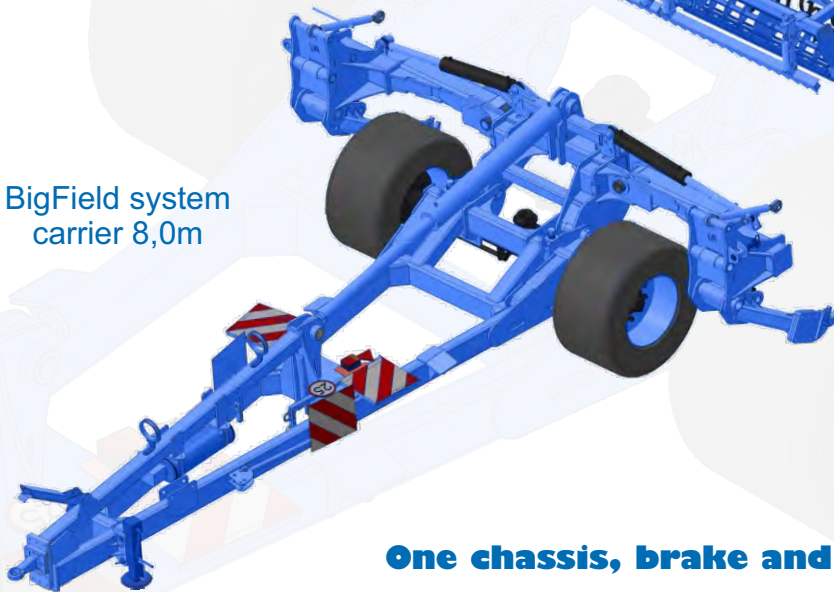


One chassis, brake and folding system for many agricultural devices

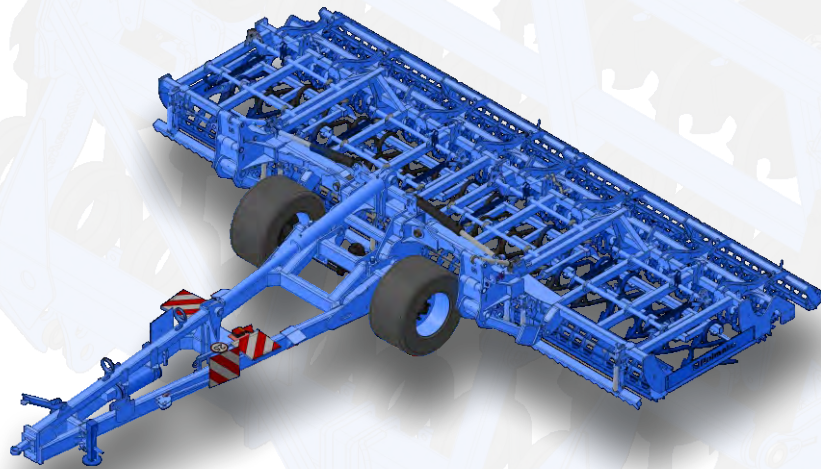

Working position

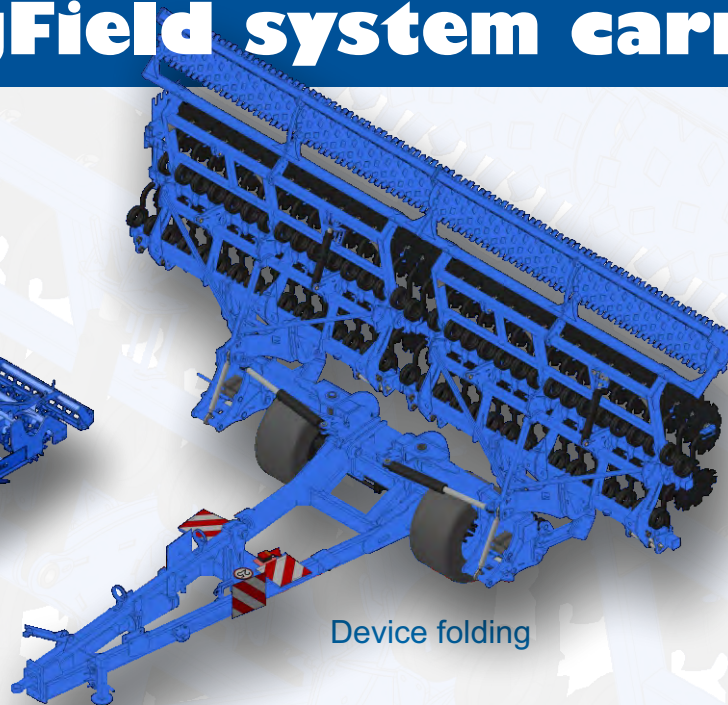


Device folding






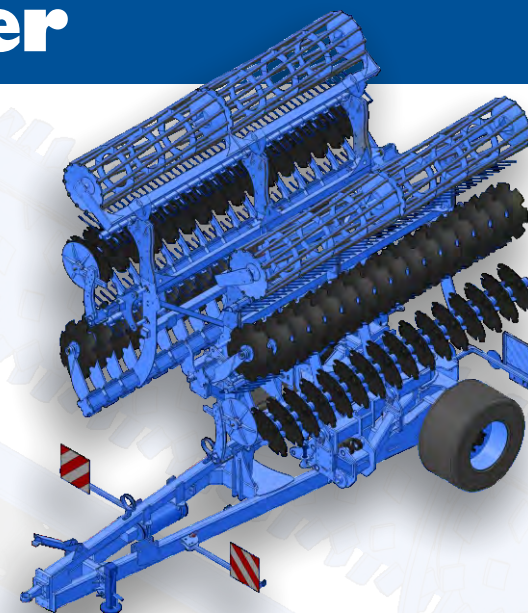


Transport position

The applied chassis system with a suspension system that allows to connect two tillage machines with a width of 4.0 m makes it possible to use the machine efficiently depending on the needs, e.g. machine manufactured once in combination with a disc harrow can be replaced with a pre-sowing cultivator by disconnecting two machines 4.0 m, purchased with the device, from the equipment lifting device and connecting other tillage machines. This versatility of applications allows to avoid the costs related to multiple purchase of the chassis, braking system and hydraulic system of folding to the transport position. It is also possible to use any mounted tillage machine 4.0 m with smaller tractors without using the chassis with a suspension system.

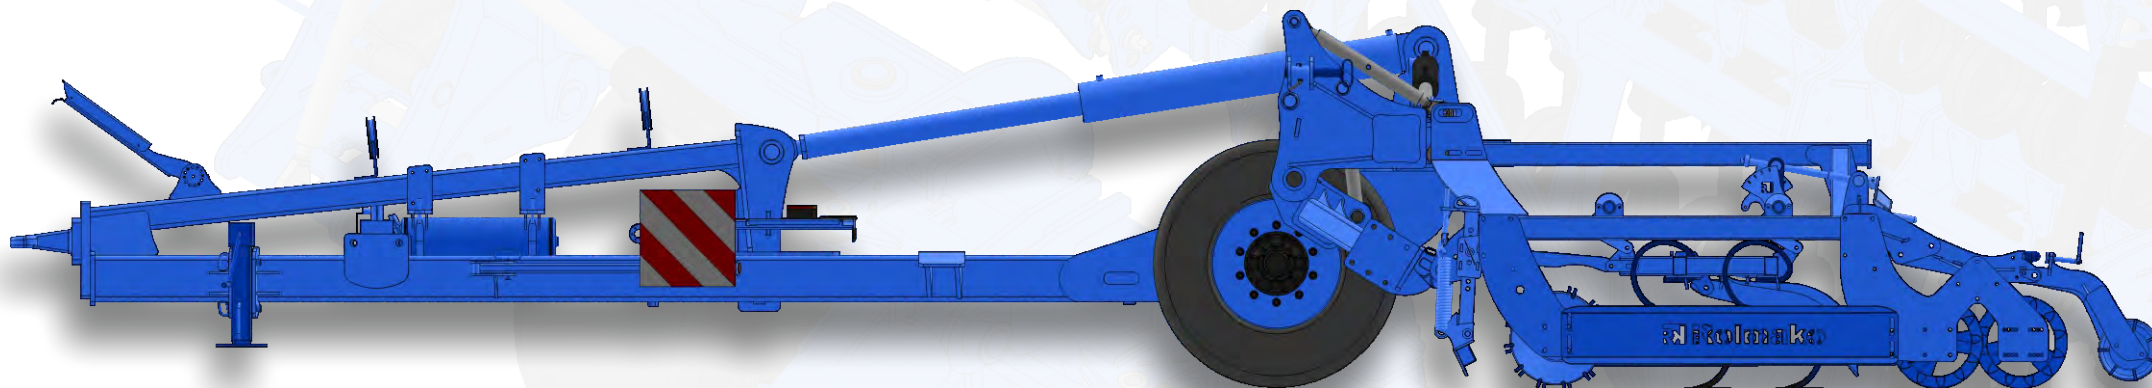

The transport height of the BigField system carrier depends on the fact which tillage machines we will connect it with and on the configuration of these machines (tillage roller diameter, additional equipment options). The machine may exceed the maximum transport height of 4.0 m, valid in traffic for public roads. The transport width of the machine does not exceed 3.0 m.

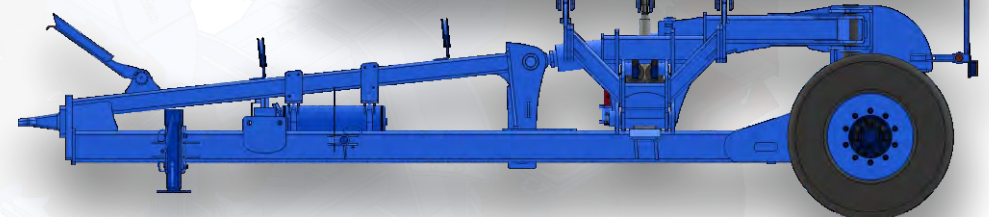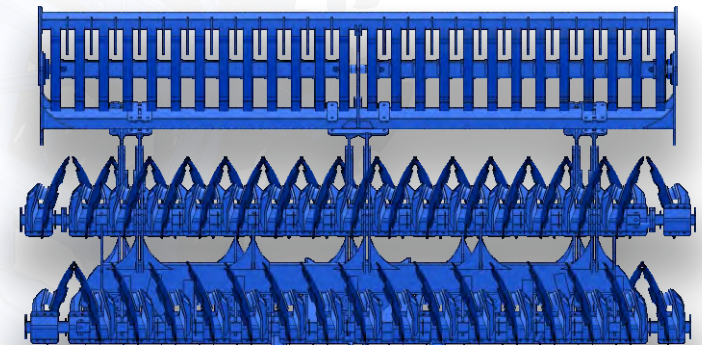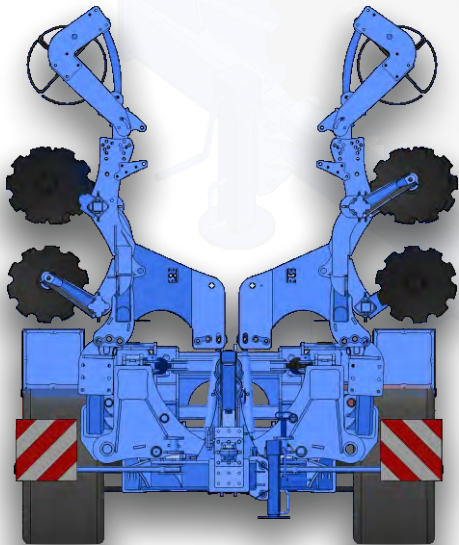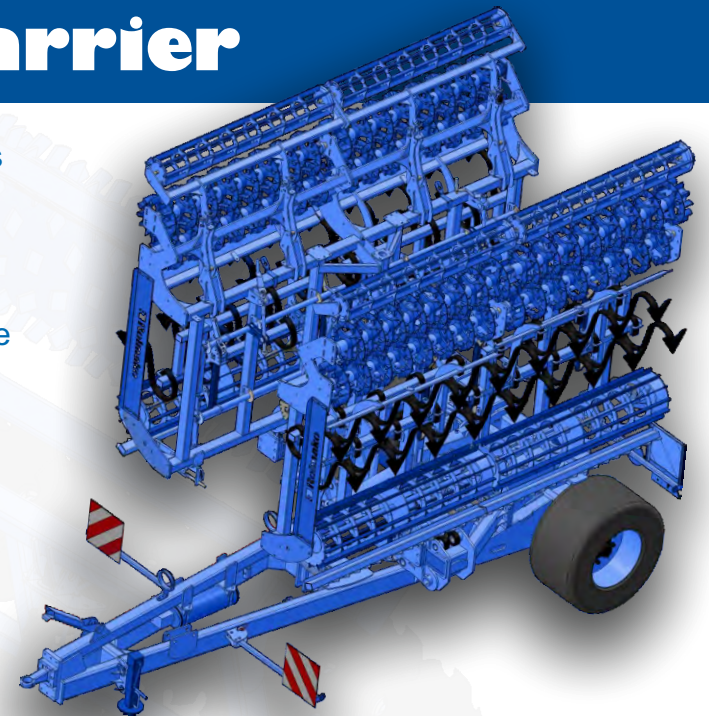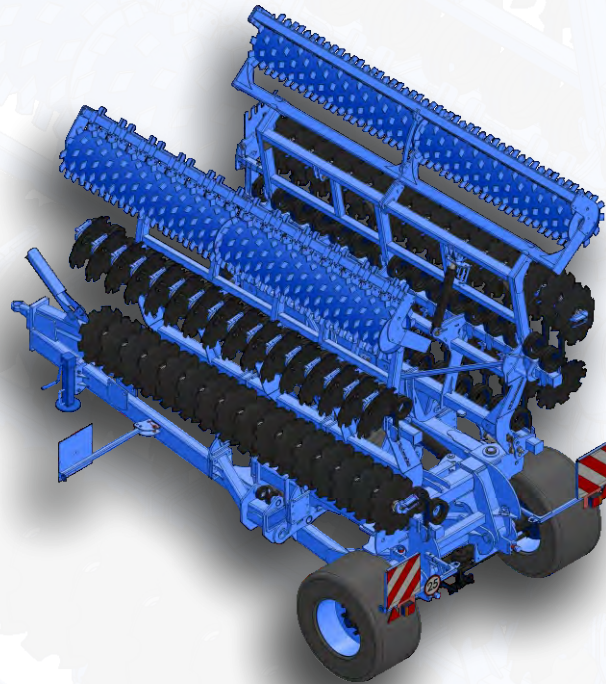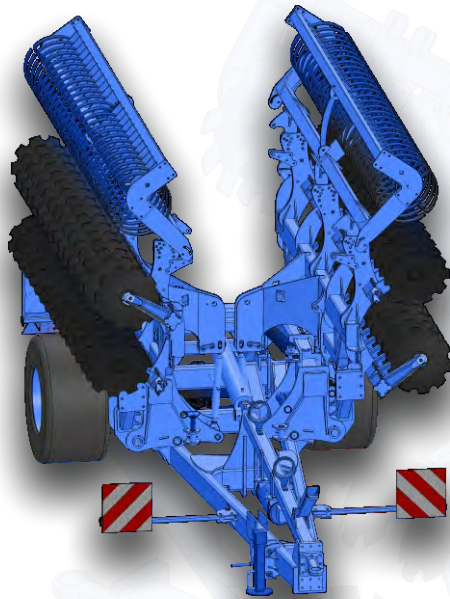

Rolmako - Agricultural machinery
Factory No. 1 - ul. Gwarna 8
Factory No. 2 - ul. Nekielska 11 F
phone number (+48 61) 438 87 35
Poland, Psary Małe near Września
62-300 Września, Wielkopolska province
<http://www.rolmako.com>